

# Asphalt Patch

Paving Patch Material



Asphalt Patch is a simple, durable solution for filling cracks, potholes and fault lines. This sealant is made from a mix of flexible, yet resilient ingredients, including screened aggregate, tar and asphalt binders. It remains pliable within its container until it is applied to pavement surfaces, and remains loose enough for easy application at 15°F. Once it sets up, it keeps cracks sealed at all temperatures.

## Use for Repairing:

- Concrete
- Asphalt
- Black Top
- Stone
- Brick Roads
- Parking Areas
- Playgrounds
- Driveways

## Features and Benefits

- Can be used in any weather
- No primer coat is needed
- Can be used in temperatures as low as 15°F

## Properties

Appearance:	Black coated stone
Fragrance:	Tar, Petroleum
Solubility:	Negligible in water
Flash Point:	> 200°F
Stability:	2 years at 70°F

**Directions** Complete directions on product label  
Clean area to be repaired of debris. Fill with Asphalt Patch to about 2" above top of surface. Tamp until packed firmly. Add additional amounts of Asphalt Patch to bring repaired area level to rest of surface.

## Ingredients

	CAS Number
Limestone:	1317-65-3
Asphalt:	8052-42-4
Petroleum Solvent:	68476-34-6
Quartz:	14808-60-7

## Safety


Danger: Causes skin irritation. May cause cancer. May cause damage to organs through prolonged or repeated exposure.

## DOT Shipping (Ground Transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

## Quantities

5 gallon

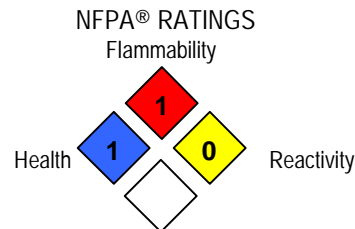

CleaningChemicalSupply.com | 1.888.678.7489 | Fax: 877.978.7489