

# DIESEL FUEL ANTI-GEL

## Concentrated fuel additive



This anti-gel additive for diesel fuels and all grades of heating fuel oil reduces the pour point to keep them flowing to engines and boilers in cold weather. It also modifies the shape and structure of wax crystals as they form in the cold oil, preventing the clogging of lines and filters.

### Effectively:

- Reduces gelling.
- Stabilizes fuel.
- Interferes with the formation of wax crystals in the fuel.

### Features and Benefits

- Keeps all types of fuel oil and diesel fuel flowing in cold weather.
- Prevents the formation of wax crystals.
- Eliminates the need for tank heaters.

### Properties

Appearance.....	Colorless liquid
Fragrance.....	Solvent Odor
Specific gravity.....	0.89g/mL
Flash point.....	120° F
Stability.....	1 year
Solubility.....	Insoluble in water

### Directions Complete directions on product label

To all grades of fuel, add 12 ounces per 150 gallons of fuel. This will lower the pour point of the fuel by 20° F. Additional treatment may lower the pour point by several more degrees.

### Active Ingredients

Light Aromatic Solvent Naphtha .....	64742-95-6
Solvent Naphtha (Petroleum), Heavy Aromatic.....	64742-94-5
Naphthalene.....	91-20-3
1,2,4-trimethylbenzene.....	95-63-6
Xylene.....	1330-20-7

### CAS Number


### Safety

Caution: Flammable liquid and vapor. Harmful if swallowed. May be fatal if swallowed and enters airways. Causes skin irritation. May cause serious eye irritation. May cause respiratory irritation. May cause drowsiness or dizziness. May cause genetic defects. May cause cancer. Keep out of the reach of children.

### DOT Shipping (ground transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

### NFPA® RATINGS

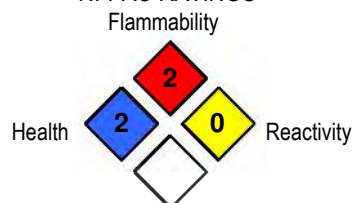

### Quantities

55 gallon  
35, 30 & 20 gallon  
5 or 6 gallon  
6 X 1 gallon  
4 X 1 gallon

